

NOTES:

1. MATERIALS

1.1 CABLE: {[7/0.12TC+7/0.12CCS+AM+PVC]*3COAX+(7/0.12CCS+PVC)*7C+AM+7/0.12CCS+B(128/0.12ALM)+BLACK PVC JACKET .

OD:8.2±0.2mm.

CABLE MARKING:E324703 AWM STYLE 2919 80°C 30V LOW VOLTAGE COMPUTER CABLE

1.2 P1: HDB 15PIN MALE: SOLDER TYPE, BLUE PBT INSULATION, EMPTY NINE PIN, GOLD FLASH CONTACTS, NICKEL PLATED SHELL;

1.3 THUMB SCREW TO BE MOLDED BLACK PVC.

1.4 FERRITE TO BE MOLDED BLACK PVC.

1.5 HOOD MOLDED BLACK PVC.



2. TESTING: 100% OPEN AND SHORT TEST.

3. PACKING:1PCS/PE BAG .

4. ALL MATERIAL BE REACH COMPLIANT.

CUSTOMER NO	L (MM)	EAN code
CV0001	1800±50	4260113560181
CV0002	3000±70	4260113560198
CV0003	5000±70	4260113560204
CV0016	10000±150	4260113562505
CV0018	20000±300	4260113562512
CV0017	15000±200	4260113562994

PIN OUT

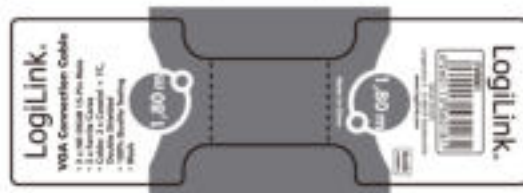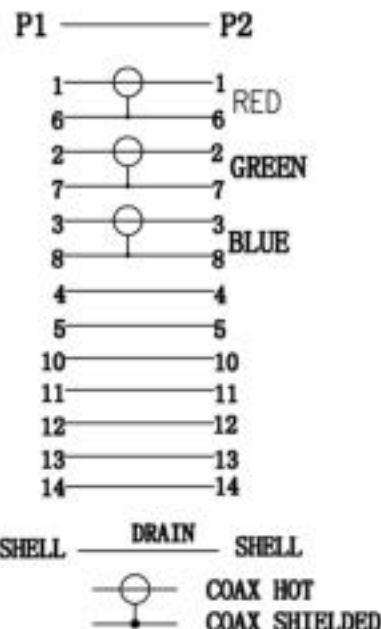

RoHS and REACH Compliant
100% Lead-free
100% Halogen-free

LENGTH TOLERANCE: X ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE	CUS. NAME:
ANGLE TOLERANCE: X° ± 3° .X° ± 1°	UNIT: mm	
	VERSION: 00	
	PAGE: 1/1	

PRODUCT NO:	CUSTOMER NO:	ENG: XIAO
DRAWING NO: 0916	PRODUCT DESCRIPTION: VGA 3+7, HDB15P M/M+FERRITE	CHECKED:
		APPROVED:

00	NEW ISSUE	2014-09-06
REV.	MODIFY DESCRIPTION	DATE