
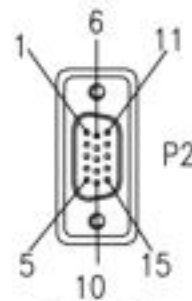


HDB15 M

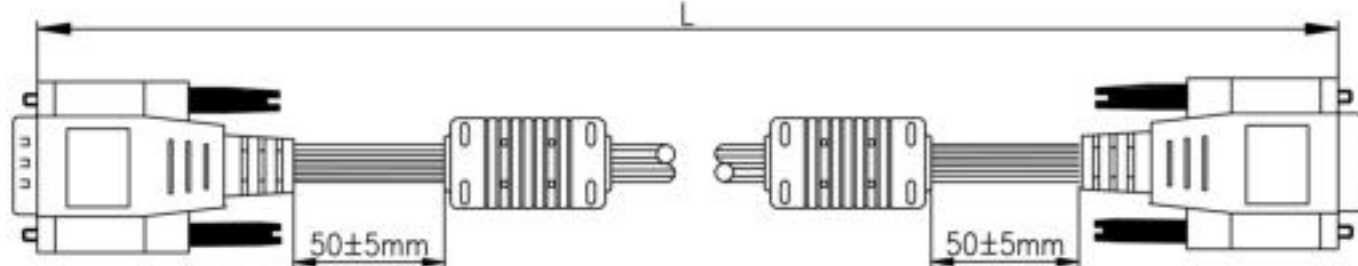

HDB15 F

NOTES:

1. MATERIALS

1.1 CABLE: [7/0.12TC*1C+7/0.12CCS+AM+PVC]*3COAX+(7/0.12CCS+PVC)*7C+AM+7/0.12CCS
+B(128/0.12ALM)+BLACK PVC JACKET

OD:8.2±0.2MM

CABLE MARKING: E324703 AWM STYLE 2919 80℃ 30V LOW VOLTAGE COMPUTER CABLE

1.2 P1: HDB 15PIN MALE: SOLDER TYPE, BLUE PBT

INSULATION, EMPTY NINE PIN, GOLD FLASH CONTACTS, NICKEL PLATED SHELL;

1.3 P2: HDB 15PIN FEMALE: SOLDER TYPE, BLUE PBT

INSULATION, GOLD FLASH CONTACTS, NICKEL PLATED SHELL;

1.4 HOOD MOLDED BLACK PVC.

1.5 THUMB SCREW TO BE MOLDED BLACK PVC.

1.6 FERRITE TO BE MOLDED BLACK PVC.


2 TESTING:100% OPEN AND SHORT TEST.

3. PACKING:1PCS/PE BAG.


4. ALL MATERIAL BE REACH COMPLIANT.

PIN OUT

P1 ——— P2

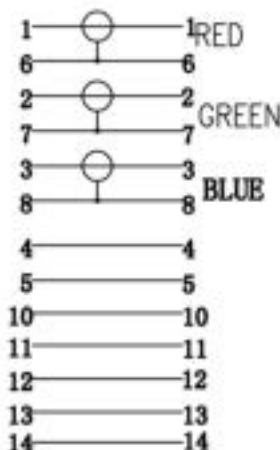

SHELL ——— DRAIN ——— SHELL



CUSTOMER NO	L(MM)	EAN code
CY0004	1800±50	4260113560211
CY0005	3000±70	4260113560228
CY0006	5000±70	4260113560235
CY0021	15000±200	4260113563007
CY0019	10000±150	4260113563014
CY0022	20000±300	4260113563021



LENGTH TOLERANCE:	SCALE:	CUS. NAME:
X. ± 0.5	FREE	
.X ± 0.2	UNIT:	
.XX ± 0.1	mm	
ANGLE TOLERANCE:	VERSION:	
X' ± 3'	00	
.X' ± 1'	PAGE:	1/1

PRODUCT NO:	CUSTOMER NO:	ENG: XIAO
DRAWING NO: 1035	PRODUCT DESCRIPTION: VGA 3+7, HDB15P M/F+FERRITE	CHECKED:
		APPROVED:

00	NEW ISSUE	2014-09-06
REV.	MODIFY DESCRIPTION	DATE