
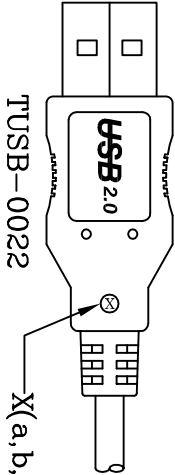


ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
1*2	B	ECR #110112-3 ADD POLYBAG,LABEL,EAN CODE	01/12/11'

USB A TYPE MALE

INS:BLACK

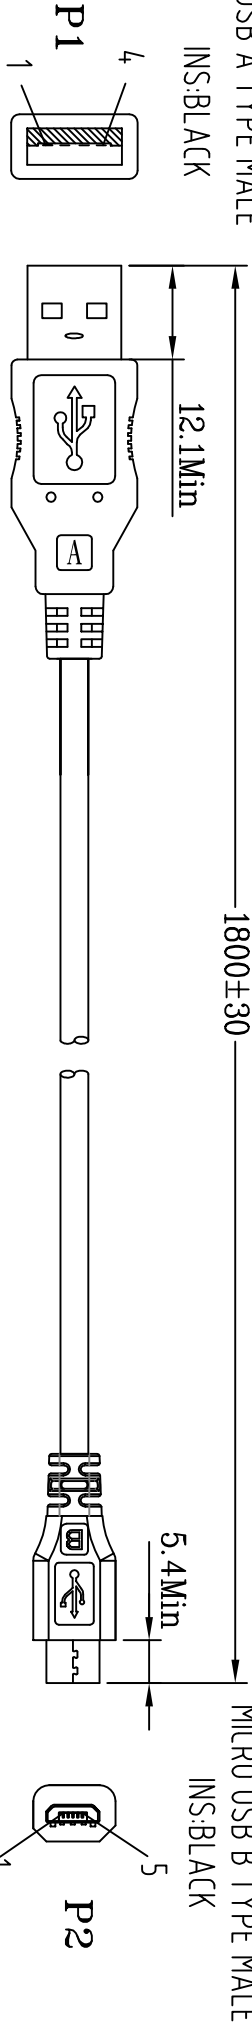

NOTES:

- 1.CABLE: UL-2725 [28AWG(7/0.127 T.C)*1P INS:HD-PE ID:0.8±0.05 +28AWG(7/0.127 T.C)*2C INS:PP ID:0.63±0.05+AL-FOIL/MYLAR +DRAIN WIRE(7/0.127 T.C)+BRAID 85%] PVC JACKET OD:3.8±0.15mm COLOR:BLACK(NK-K01) REV 2.0.(C2725695-1)

2.CONNECTORS:

P1:USB A TYPE MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.

P2:MICRO USB B TYPE MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL.

3.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)

4.TEST REQUEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST.
<2>.CONTACT RESISTANCE 3 Ohm MAX.
<3>.INSULATION RESISTANCE 10M Ohm MIN.
5.PACKING:SEE P-0210

<1>EACH PC / POLYBAG + EAN CODE LABEL
<2>EACH CARTON / ROHS LABEL(L*W=35*22mm)

6.EAN CODE:4260113573778

PIN OUT

	P1	P2
RED	1	1
WHITE	2	2
GREEN	3	3
BLACK	4	5

SHELL _____ BRAID _____ SHELL _____

Tolerance Inch M/M					
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05			
Draw	FANNIE 01/12/11'		Title USB A/M – MICRO USB B/M CABLE		
Check					
Engr			App'd	Customer: E-DIR	
Dwg No.	170-4025	REV: B	Scale	NONE	Units
			m/m	Third Angle Projection	Angle
					
					
					1/2



LTR	REV.	DESCRIPTION	DATE
1*2	B	ECR #110112-3 ADD POLYBAG,LABEL,EAN CODE	01/12/11'

POLYBAG



R2x4

70mm

50mm

LABEL: PANTONE 2945C



LABEL POSITION IN THE MIDDLE

Tolerance Inch M/M					
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05			
Draw					
FANNIE 01/12/11'					
Check	App'd	Customer: E-DIR			
Engr	Scale	NONE	Units	m/m	Third Angle Projection
	Dwg No.	170-4025	REV: B	Sheet	2/2