


54 ABDF

ESPECIFICACIONES INSTALACIÓN INSTALLATION FEATURES

Instalación Installation	Embutir Flush	Profundidad aleta Jaw deep	6,00 mm
Reversible Reversible	Si Yes	Ajuste aleta flex Flex jaw adjust	4 mm
Alto High	67 mm	Ciclos testeados Tested cycles	200.000
Ancho Width	21 mm	Rango temperatura trabajo Temperature working range	-25°C/50°C
Profundo Deep	28 mm	Resistencia a rotura Breaking resistance	330 Kg

PLANO TÉCNICO TECHNICAL DRAW

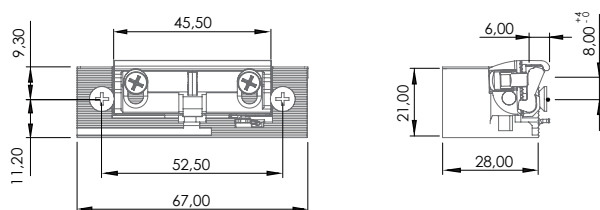

FUNCIONES FUNCTIONS

Desbloqueo Unlatching	Si Yes
Microswitch (305) Microswitch (305)	No No
Diodo Diode	Opcional Optional
Varistor Varistor	Opcional Optional

ESPECIFICACIONES ELÉCTRICAS ELECTRIC FEATURES

RANGO VOLTAJE VOLTAGE RANGE	10-24		6-12	8-12	24	12 (412)	24 (424)	12 (512)	24 (524)
	AC-DC		AC-DC	AC-DC	AC-DC	DC	DC	DC	DC
FUNCIONAMIENTO FUNCTIONMENT	FAIL SECURE		FAIL SECURE	FAIL SECURE	FAIL SECURE	FAIL SECURE	FAIL SECURE	FAIL SAFE	FAIL SAFE
	N	A-AB							
RESISTENCIA BOBINA (Ω) COIL RESISTANCE (Ω)	43	35	8	17	58	38	132	58	240
CICLO CARGA ELÉCTRICA (%ED) ELECTRIC DUTY CYCLE (%ED)	100% ED 12 VDC	100% ED 12 VDC	10% ED 12 VDC	20% ED 12 VDC	20% ED 24 VDC	100% ED 12 VDC	100% ED 24 VDC	100% ED 12 VDC	100% ED 24 VDC
CONSUMO CORRIENTE AC (mA) AC CURRENT CONSUMPTION (mA)	175 (10V) 200 (12V) 400 (24V)	230 (10V) 270 (12V) 540 (24V)	565 (6V) 1150 (12V) -	350 (8V) 510 (12V) -	340	-	-	-	-
CONSUMO CORRIENTE DC (mA) DC CURRENT CONSUMPTION (mA)	240 (10V) 280 (12V) 570 (24V)	290 (10V) 350 (12V) 690 (24V)	750 (6V) 1500 (12V)	490 (8V) 715 (12V)	-	320	200	210	110
MÁXIMA PRECARGA APERTURA AC MAXIMUM PRELOAD OPEN AC	70N (12V)		200N (12V)	-	-	-	-	-	-
MÁXIMA PRECARGA APERTURA DC MAXIMUM PRELOAD OPEN DC	30N (12V)		-	-	-	-	-	-	-
TOLERANCIA BOBINA COIL TOLERANCE	Máxima tolerancia bobina 5% Max.coil tolerance 5%								

