

99 ABDF


ESPECIFICACIONES INSTALACIÓN

INSTALLATION FEATURES

Instalación Installation	Embutir Flush	Profundidad aleta Jaw deep	4,70 mm
Reversible Reversible	Si Yes	Ajuste aleta flex Flex jaw adjust	3 mm
Alto High	66 mm	Ciclos testeados Tested cycles	200.000
Ancho Width	16 mm	Rango temperatura trabajo Temperature working range	-15°C/40°C
Profundo Deep	25,50 mm	Resistencia a rotura Breaking resistance	325 Kg

PLANO TÉCNICO

TECHNICAL DRAW

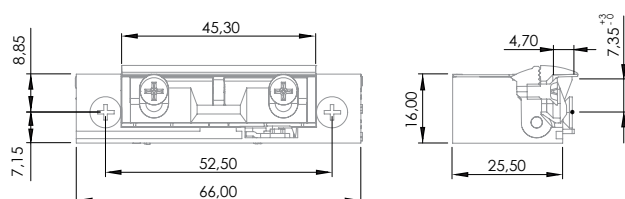

FUNCIONES

FUNCTIONS

Desbloqueo Unlatching	Si Yes
Microswitch (305) Microswitch (305)	No No
Diodo Diode	Opcional Optional
Varistor Varistor	Opcional Optional

ESPECIFICACIONES ELÉCTRICAS

ELECTRIC FEATURES

RANGO VOLTAJE VOLTAGE RANGE	10-24		6-12	8-12	24	24 (424)	12 (512)	24 (524)
	AC-DC		AC-DC	AC-DC	AC	DC	DC	DC
FUNCIONAMIENTO FUNCTIONMENT	FAIL SECURE		FAIL SECURE	FAIL SECURE	FAIL SECURE	FAIL SECURE	FAIL SECURE	FAIL SECURE
	N	A-AB						
RESISTENCIA BOBINA (Ω) COIL RESISTANCE (Ω)	43	38	8	17	58	132	63	230
CICLO CARGA ELÉCTRICA (%ED) ELECTRIC DUTY CYCLE (%ED)	100% ED 12 VDC	100% ED 12 VDC	10% ED	20% ED	20% ED	100% ED 24 VDC	100% ED 12 VDC	100% ED 24 VDC
CONSUMO CORRIENTE AC (mA) AC CURRENT CONSUMPTION (mA)	175 (10V) 200 (12V) 400 (24V)	210 (10V) 250 (12V) 510 (24V)	565 (6V) 1150 (12V)	350 (8V) 510 (12V)	340	-	-	-
CONSUMO CORRIENTE DC (mA) DC CURRENT CONSUMPTION (mA)	240 (10V) 280 (12V) 570 (24V)	270 (10V) 320 (12V) 650 (24V)	750 (6V) 1500 (12V)	490 (8V) 715 (12V)	-	200	200	110
MÁXIMA PRECARGA APERTURA AC MAXIMUM PRELOAD OPEN AC	250N (12V) 360N (24V)		-	-	-	-	-	-
MÁXIMA PRECARGA APERTURA DC MAXIMUM PRELOAD OPEN DC	55N (12V) 220N (24V)		-	-	-	-	-	-
TOLERANCIA BOBINA COIL TOLERANCE	Máxima tolerancia bobina 5% Max coil tolerance 5%							

