
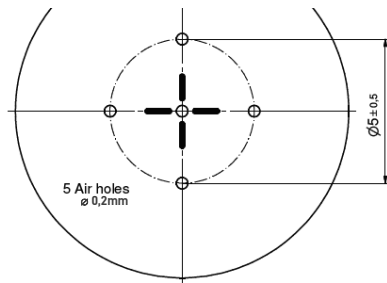


Data sheet 675

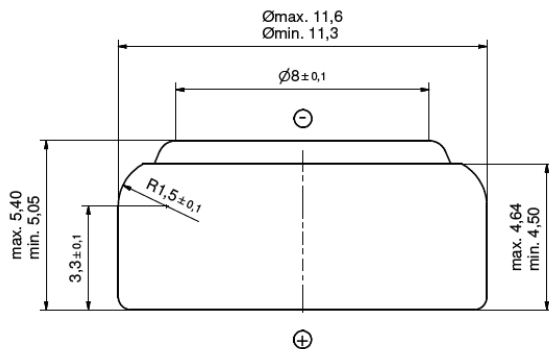

Specifications:

Chemical system:	Zinc / Air
Nominal voltage:	1,45 V
IEC Standard Test Capacity:	124 h*
IEC High Drain Test Capacity:	71 h**
Impedance:	max. 4 Ω@ 1kHz
Weight:	approx 1,83 g
Volume:	approx 0,55 ccm
Storage:	10-30°C / 20-80 % r.h.
Operating:	0-45°C / 25-70 % r.h.
Short Exposition:	-10-65°C / 5-95 % r.h.

*IEC Hearing aid standard test to 1,05 V at 20°C / 55% r.h.
according to IEC 60086-2:2021

**IEC Hearing Aid high drain test to 1,05 V at 20°C / 55% r.h.
according to IEC 60086-2:2021

Dimensions:

according to IEC 60086-2:2021

IEC: PR44