

LERMER XXI S.L

NO:

TEVISION

DATE

NO:

TEVISION

DATE

1

4

2

5

3

6


R.NO.

R O

DRAWN

AUDIT


CHECK



2.20

PC2252

9.30

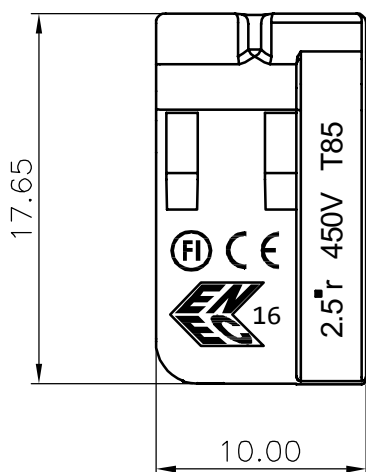



17.65



16

2.5r 450V T85

10.00

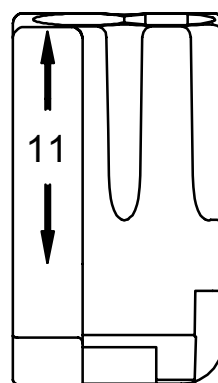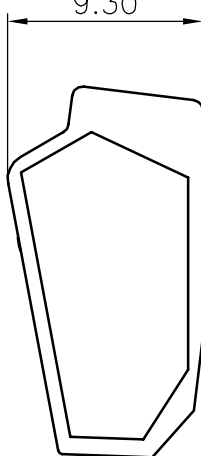

11

ALL DIMENSION IN MM UNLESS OTHERWISE STATED : 0.= ±0.2mm 00.= ±0.4mm

Polycarbonate (PC), flame-retardant to UL 94V-0

LERMER XXI S.L.

Current : 24A (IEC)

Voltage : 450V (IEC)

Working Temp : T85 (IEC)

Wire Range : 0.5 - 2.5 mm², Sol / Rigid (IEC)

Stripping Length : 11mm (0.43 inch)

TITLE :

PUSH-IN WIRE CONNECTORS

Part No.: PC2252-R