

LERMER XXI S.L

NO:

TEVISION

DATE

NO:

TEVISION

DATE

1

4

2

5

3

6





R.NO.

R.O

DRAWN

AUDIT

CHECK

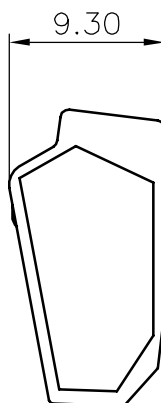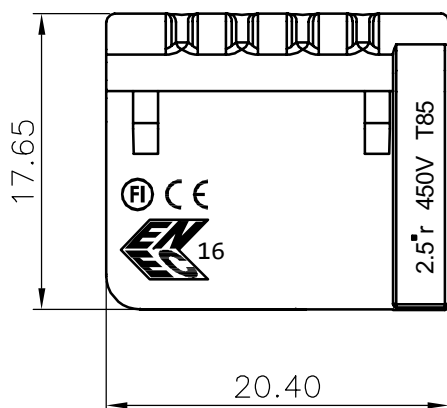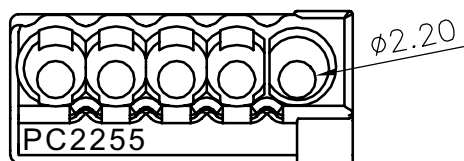

ALL DIMENSION IN MM UNLESS OTHERWISE STATED : 0.=  $\pm 0.2$ mm 00.=  $\pm 0.4$ mm

Polycarbonate (PC), flame-retardant to UL 94V-0

LERMER XXI S.L.

Current : 24A (IEC)

Voltage : 450V (IEC)

Working Temp : T85 (IEC)

Wire Range : 0.5 - 2.5 mm<sup>2</sup>, Sol / Rigid (IEC)

Stripping Length : 11mm (0.43 inch)

TITLE :

PUSH-IN WIRE CONNECTORS

Part No.: PC2255-G