


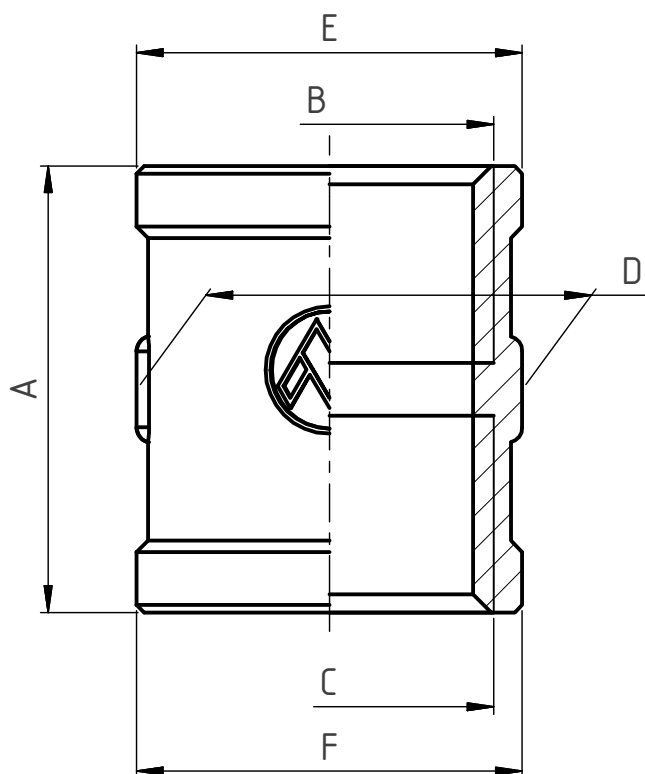

-Manguito H-H
-Straight Coupler F-F

CODG / CODE	A	B	C	D	E	F
341001	24	3/8"	3/8"	21.5	Ø21	Ø21
341002	29.5	1/2"	1/2"	25.9	Ø25.9	Ø25.9
341003	33	3/4"	3/4"	33	Ø33	Ø33
341004	37	1"	1"	39	Ø39	Ø39
341005	43	1"-1/4	1"-1/4	56	Ø49	Ø49
341006	47	1"-1/2	1"-1/2	56.5	Ø56.5	Ø56.5
341007	52	2"	2"	69	Ø67.5	Ø67.5
341008	70.5	2"-1/2	2"-1/2	90	Ø87	Ø87
341009	75	3"	3"	104	Ø101.8	Ø101.8
341000	82	4"	4"	130	Ø128	Ø128

(Medidas orientativas sin valor contractual)
(Indicative measures without contractual value)

Dimensiones según EN 1254-4

Dimensions according EN 1254-4

Material: CW617N

Raw material: CW617N

PN 20

NP 20

Temp. Max: 110°C

Max. Temp: 110°C

Dpto. Técnico y Calidad
Technical department & quality
Sr. Marc Rodríguez