


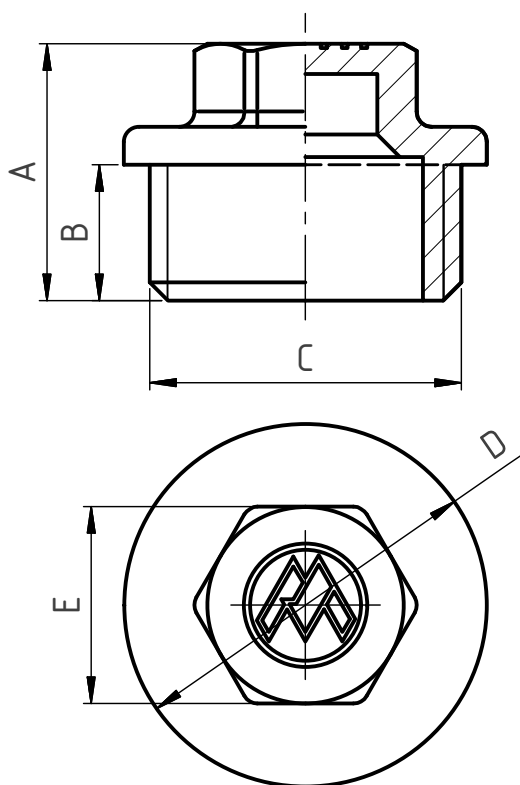

-Tapón M  
-Male Plug

| CODG / CODE | A    | B    | C      | D     | E       |
|-------------|------|------|--------|-------|---------|
| 361333      | 10.5 | 6.5  | 1/8"   | ---   | E/C 12  |
| 361444      | 11.5 | 7.5  | 1/4"   | ---   | E/C 15  |
| 361001      | 15.5 | 7.5  | 3/8"   | Ø20   | E/C 11  |
| 361002      | 17   | 9    | 1/2"   | Ø24   | E/C 13  |
| 361003      | 21   | 11.5 | 3/4"   | Ø30   | E/C 15  |
| 361004      | 23.5 | 13   | 1"     | Ø38   | E/C 17  |
| 361005      | 25   | 14   | 1"-1/4 | Ø48   | E/C 19  |
| 361006      | 27.5 | 16   | 1"-1/2 | Ø54.5 | E/C 21  |
| 361007      | 31   | 19   | 2"     | Ø66   | E/C 23  |
| 361000      | 36   | 24   | 4"     | ---   | E/C 125 |

(Medidas orientativas sin valor contractual)

(Indicative measures without contractual value)

Dimensiones según EN 1254-4

Dimensions according EN 1254-4

Material: CW617N

Raw material: CW617N

PN 20

NP 20

Temp. Max: 110°C

Max. Temp: 110°C

Dpto. Técnico y Calidad  
Technical department & quality  
Sr. Marc Rodríguez