

3M Construction & Home Improvement Markets

Product Information Sheet

Issue : December 2021
Supersedes: March 2021

Command® Adhesive: Indoor/General Purpose Clear Strips



General Description

Command® Indoor Clear Strips are made with high-performance pressure sensitive adhesives that hold strongly to a wide variety of surfaces, including paints that can be challenging to stick to. They are quick and easy to install without tools, but can also be removed cleanly without damage, thanks to the unique, stretchable backing.

Command® Strips come in multiple sizes. The strips are designed to work with Command™ products, including hooks, hangers, caddies, and clips to help consumers fearlessly decorate and organize their space.

Strip Construction

	Clear Strip
Backing	Polyethylene Film
Adhesive Black Side	Rubber Resin
Adhesive Blue Side	Rubber Resin
Average Thickness	0.355 mm
Color	Clear, colorless
Release Liner	0,076 mm, white paper with blue and black print


Typical Physical Properties and Performance Characteristics:

Typical Physical Properties	value	Method
Static shear strength	1kg @ 22°C	ASTM D-3654
Temperature resistance	10°C to 40°C	Internal method
UV resistance	Not recommended for direct exposure to U.V. light	Internal method
Shelf life	24 months from date of manufacture when stored in original cartons at 21°C and 50% relative humidity	

The values displayed are the result of illustrative lab test measures made according to the indicated test method and shall not be considered as a commitment from 3M

Available Sizes

	Strip Width & Length	Tab Length	Adhesive Width & Length (Wall Side)	Adhesive Width & Length (Object Side)
Large	1.9 X 9.27 cm	1.9 cm	1.9 X 7.36 cm	1.9 X 6.85 cm
Medium	1.58 x 6.98 cm	1.9 cm	1.58 X 5.08 cm	1.58 X 4.56 cm
Small	1.58 x 4.6 cm	1.9 cm	1.58 x 2.69 cm	1.58 X 2.17 cm
Mini	1.27 x 2.99 cm	1.4 cm	1.27 X 1.55 cm	1.27 X 1.55 cm

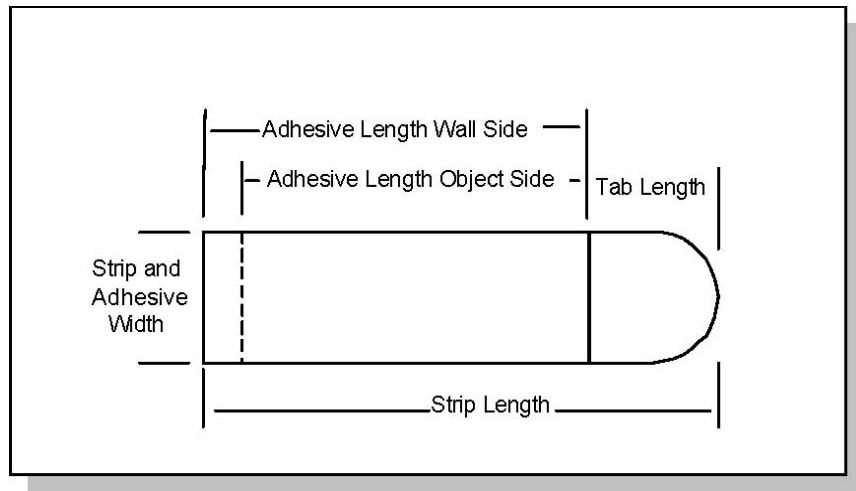

Feature	Advantage	Benefit
Black (Wall) Side Adhesive	High adhesion	Excellent holding power
	Broad adhesion	Adheres to a wide variety of surfaces, including difficult to stick to paints
	Quick and easy to install	No tools required
Blue (Object) Side Adhesive	High adhesion	Excellent holding power
	Broad adhesion	Adheres to a wide variety of surfaces
	Quick and easy to install	No tools required
Stretch-Release Technology	Easy removal	Removes cleanly from most surfaces without damage
Film Backing	Clear	Transparent and inconspicuous appearance on most surfaces
	Thin	Ideal for low profile mounting
Hooks, Clips, Organizers, Accessories	Molded plastic utility and decorative styles	Designed to hold items ranging in weight from 0.5 – 4 lbs.



Notes:

- Failure to follow instructions carefully may result in damage
- Do not use with wallpaper
- May not adhere well to vinyl surfaces
- DO NOT use for antiques, heirlooms, or other valuable or irreplaceable items
- DO NOT hang objects over beds
- Apply to surfaces above 10° C
- Adhesive could soften and lose adhesion above 40°C
- Not for use in direct sunlight
- Not for use in wet environments
- Will not adhere to dirty, dusty, or oily surfaces
- Wait at least 7 days to apply to freshly painted surfaces
- Not recommended for use on bare wood or porous, unpainted surfaces
- Holding capacity is reduced if adequate pressure is not applied over 30 seconds or if the load is applied less than one hour after the adhesive has been applied

3M Construction and Home Improvement Markets Division
Please write your local 3M address

IMPORTANT NOTICE: All statements, technical information and recommendations herein are based on tests and studies 3M believes to be reliable. 3M does not warrant or guarantee the accuracy or completeness of this information. Because there are many factors that can affect the use and performance of this product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluates this product to determine whether it is fit for a particular purpose, is suitable for the user's method of application, and meets the user's performance specifications and expectations. Before any use, it is always recommended to read and follow the instructions for use and to conduct tests to validate the adequacy of the product with regard to the envisaged use. Any action or use of the product made in breach of these indications is at the risks of the user and consequently 3M cannot be held responsible for whatever negative consequences may arise out of or in connection with any breach of the given instructions and indications. Compliance with 3M instructions for use and other recommendations does not exempt the user from respecting other local applicable rules (safety rules, standards and procedures) governing the use of the concerned product in specific contexts and/or through specific means or tools.

Limitation of Liability: 3M's only obligation shall be to replace such quantity of this 3M product proved to be defective or to return the purchase price. Statements or recommendations not contained herein shall not have any force or effect unless included in an agreement signed by a 3M officer.

3M reserves the right to amend the whole or part of this document at any time, without notice.