

3M Construction & Home Improvement Markets

Product Information Sheet

Issue : December 2021

Supersedes : March 2021

Command® Adhesive: Indoor/General Purpose Strips

Description



Command® Indoor Strips are made with high-performance pressure sensitive adhesives that hold strongly to a wide variety of surfaces, including paints that can be challenging to stick to. They are quick and easy to install without tools, but can also be removed cleanly without damage, thanks to the unique, stretchable backing.

Command® Strips come in multiple sizes. The strips are designed to work with Command™ products, including hooks, hangers, caddies, and clips to help consumers fearlessly decorate and organize their space.

Strip Construction

Product Characteristics	White Strip
Backing	Polyethylene foam
Adhesive Black side	Silicone
Adhesive Red side	Rubber resin
Average thickness	1,1 mm
Color	White
Release liner	White paper with red and black print (0,076 mm)
Backing density	96 kg/m ³

Typical Physical Properties	value	Method
Static shear strength	1kg @ 22°C	ASTM D-3654
Temperature resistance	10°C to 40°C	Internal method
UV resistance	Not recommended for direct exposure to U.V. light	Internal method
Storage conditions	Store in original cartons at 16° to 27°C and 40 to 60 % relative humidity	


The values displayed are the result of illustrative lab test measures made according to the indicated test method and shall not be considered as a commitment from 3M

3M Construction & Home Improvement Markets

Product Information Sheet

Available sizes


	Strips width & length	Tab length	Adhesive width & length (wall side)	Adhesive width & length (object side)
Large	1.9 X 9.27 cm	1.9 cm	1.9 X 7.36 cm	1.9 X 6.85 cm
Medium	1.58 x 6.98 cm	1.9 cm	1.58 X 5.08 cm	1.58 X 4.56 cm
Small	1.58 x 4.6 cm	1.9 cm	1.58 x 2.69 cm	1.58 X 2.17 cm
Mini	1.27 x 2.99 cm	1.4 cm	1.27 X 1.55 cm	1.27 X 1.55 cm

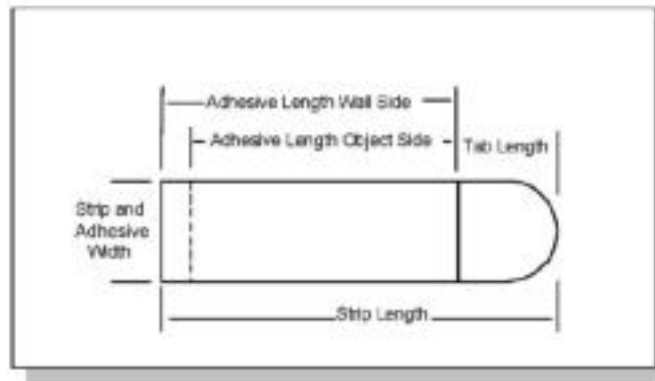

Feature	Advantage	Benefit
Black (Wall) Side Adhesive	High adhesion	Excellent holding power
	Broad adhesion	Adheres to a wide variety of surfaces, including difficult to stick to paints
	Quick and easy to install	No tools required
Red (Object) Side Adhesive	High adhesion	Excellent holding power
	Broad adhesion	Adheres to a wide variety of surfaces
	Quick and easy to install	No tools required
Stretch-Release Technology	Easy removal	Removes cleanly from most surfaces without damage
Foam Backing	Conformable	Adheres to both smooth and semi-rough surfaces
Hooks, Clips, Organizers, Accessories	Molded plastic utility and decorative styles	Designed to hold items ranging in weight from 225g –3.4 kg.

3M Construction & Home Improvement Markets

Product Information Sheet

Application and removal for hooks and other items with back plates:			Application and removal for clear hooks and other items:		
APPLY APLICAR  1 Clean surface with rubbing alcohol. Do not use household cleaners. Limpieza la superficie con alcohol isopropil. No utilizar limpiadores de uso doméstico.  2 Remove red liner. Press adhesive to hook. Retire el protector rojo. Presione el adhesivo en el gancho.  3 Remove black liner. Press to wall for 10 seconds. Retire el protector negro. Presione a la pared por 10 segundos.			APPLY APLICAR  1 Best for smooth surfaces. Clean with rubbing alcohol. Do not use household cleaners. Ideal para superficies lisas. Limpieza la superficie con alcohol isopropil. No use limpiadores domésticos.  2 Remove black liner. Apply strip to wall. Press entire strip firmly for 30 sec. Retire el protector negro. Aplique la tira en la pared. Presione toda la tira firmemente por 30 segundos.  3 Remove blue liner. Press hook to strip firmly for 30 sec. Wait 1 hour before use. Retire el protector azul. Presione el gancho de la tira firmemente por 30 segundos. Espere 1 hora antes de usar.		
 4 To ensure adhesive hold, slide hook up and off. Para garantizar la seguridad adhesiva, deslice el gancho hacia arriba para sacarlo.  5 Press base firmly for 30 seconds. Presione la base firmemente por 30 segundos.  6 Slide hook back on. Wait 1 hour before use. Coloque el gancho de nuevo, deslizándolo hacia abajo. Espere 1 hora antes de usar.			REMOVE RETIRAR  1 Hold hook gently in place. Sostenga el gancho suavemente en su lugar.  2 Never pull the strip towards you! Always pull straight down. Nunca jale la tira hacia usted! Siempre jale directamente hacia abajo.  3 Stretch the strip slowly against the wall at least 6 inches to release. Estire la tira lentamente contra la pared por lo menos 18 cm para soltar.		
REMOVE RETIRAR  1 Slide hook up and off. Deslice el gancho hacia arriba para sacarlo.  2 Gently hold mounting base in place. Sostenga la base de montaje en su lugar.  3 Never pull the strip towards you! Always pull straight down. Nunca jale la tira hacia usted! Siempre jale directamente hacia abajo.  4 Stretch the strip slowly against the wall at least 12 inches to release. Estire la tira lentamente contra la pared por lo menos 30 cm para soltar.					

Note :

- Failure to follow instruction carefully may result in damage
- Do not use with wallpaper
- May not adhere well to vinyl surfaces
- DO NOT use for antiques, heirlooms, or other valuable or irreplaceable items
- DO NOT hang objects over beds
- Apply to surfaces above 10°C
- Adhesive could soften and lose adhesion above 40°C
- Not for use on direct sunlight
- Not for use in wet environment
- Will not adhere to dirty, dusty or oily surfaces
- Wait at least 7 days to apply to freshly painted surfaces
- Not recommended for use on bare wood or porous, unpainted surfaces
- Holding capacity is reduced if adequate pressure is not applied over 30 seconds or if the load is applied less than one hour after adhesive has been applied

3M Construction & Home Improvement Markets

Product Information Sheet

**3M Construction and Home
Improvement Markets Division**
Please write your local 3M address

IMPORTANT NOTICE: All statements, technical information and recommendations herein are based on tests and studies 3M believes to be reliable. 3M does not warrant or guarantee the accuracy or completeness of this information. Because there are many factors that can affect the use and performance of this product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluates this product to determine whether it is fit for a particular purpose, is suitable for the user's method of application, and meets the user's performance specifications and expectations. Before any use, it is always recommended to read and follow the instructions for use and to conduct tests to validate the adequacy of the product with regard to the envisaged use. Any action or use of the product made in breach of these indications is at the risks of the user and consequently 3M cannot be held responsible for whatever negative consequences may arise out of or in connection with any breach of the given instructions and indications. Compliance with 3M instructions for use and other recommendations does not exempt the user from respecting other local applicable rules (safety rules, standards and procedures) governing the use of the concerned product in specific contexts and/or through specific means or tools.

Limitation of Liability: 3M's only obligation shall be to replace such quantity of this 3M product proved to be defective or to return the purchase price. Statements or recommendations not contained herein shall not have any force or effect unless included in an agreement signed by a 3M officer.

3M reserves the right to amend the whole or part of this document at any time, without notice.