




ROHS-COMPLIANT

USB 3.0 A/M 9PIN  
INS:BLUE(PT 300C)

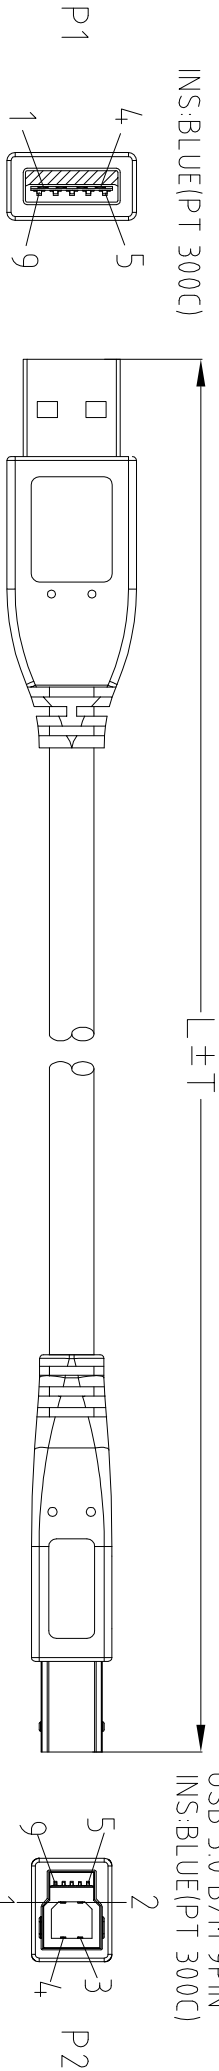

TUSB-0189

TUSB-0190

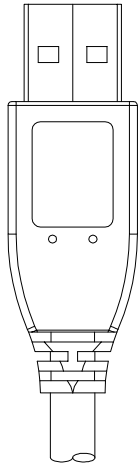

NOTE:

- 1.CABLE: UL-2725 [#28(7/0.127 T.C)×1P INS:Foam-PE+D.W(7/0.127 T.C) +AL/MY+Hot-melt-Mylar]×2C+#28(7/0.127 T.C)×1P INS:Polyolefin +#28(7/0.127 T.C)×2C INS:Polyolefin+AL/MY+B.D(85%) PVC JACKET, OD:5.2±0.15mm COLOR:BLACK(NK-K01) REV 3.0.
- 2.CONNECTOR:
  - P1: USB 3.0 A TYPE MALE 9PIN CONTACT:30u",SHELL:NI-PLATED.
  - P2: USB 3.0 B TYPE MALE 9PIN CONTACT:30u",SHELL:NI-PLATED.
- 3.HOOD:MOLDED TYPE,PVC 45P, COLOR:BLACK(NK-K01).
- 4.ELECTRICAL TEST:
  - (1)100% OPEN SHORT & MIS WIRE TEST.
  - (2)CONTACT RESISTANCE 3 ohm Max.
  - (3)INSULATION RESISTANCE 10M ohm Min.
  - (4)HI-POT DC300V
- 5.PACKING:SEE P-0210
  - <1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL
  - <2>EACH CARTON / ROHS LABEL(L×W=35×22mm)

| PIN OUT |       |
|---------|-------|
| P1      | P2    |
| 1       | 1     |
| 2       | 2     |
| 3       | 3     |
| 4       | 4     |
| 5       | 5     |
| 6       | 6     |
| 7       | 7     |
| 8       | 8     |
| 9       | 9     |
| SHELL   | SHELL |

|                    |                 |                         |                 |
|--------------------|-----------------|-------------------------|-----------------|
| Tolerance Inch M/M |                 | Title                   |                 |
| X                  | .015 .30        |                         |                 |
| XX                 | .010 .10        | USB 3.0 A/M - B/M CABLE |                 |
| XXX                | .005 .05        |                         |                 |
| Draw               | FANNIE 01/11/10 | Customer P/N            |                 |
| Check              | App'd           | Customer: E-DIR         |                 |
| Engr               | Scale           | NONE                    | Units           |
|                    | Dwg No.         | 170-3764                | REV:A Sheet:1/1 |