


Type Designation	4061
Designation IEC	(LR 8 D 425)
System	Zn-MnO ₂ (Alkaline)
Shelf Life (Coding)*	3 years
Nominal Voltage [V]	1.5
Typical Capacity C [mAh]	620 (discharge with high-resistance)
Permissible Temperature Range	- 10 °C ... 50 °C
Weight, approx. [g]	6.6
Volume [ccm]	2.2

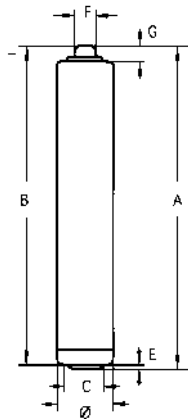

Dimensions [mm]

min: max:

Ø	7.7	8.3
A		42.5
B	41.5	
C	2.3	
E		0.1
F		3.8
G	0.7	



Typical Capacities (at 20°C):

Discharge Type	Load	End Voltage[V]	0.9
Lighting	5,1 Ω	Time [min]	119
5M/D, 7D/W		Capacity [mAh]	462
		Energy [mWh]	554
Discharge Type	Load	End Voltage[V]	0,9
Service output	75 Ω	Time [h]	36,8
1H/D, 7D/W		Capacity [mAh]	620
		Energy [mWh]	788
Discharge Type	Load	End Voltage[V]	1,1
Laser pointer	75 Ω	Time [h]	29,1
1H/D, 7D/W		Capacity [mAh]	515
		Energy [mWh]	681

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries

* In consideration of typical loss of capacity at storage and application.