


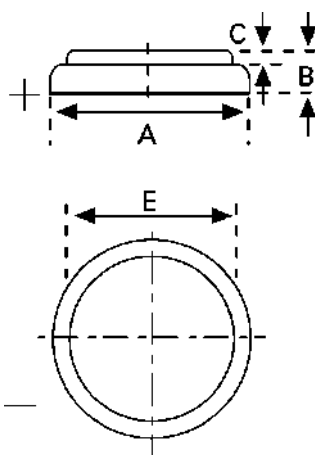

Type Designation
Designation IEC
System

6632
CR1632
Li-MnO₂
Li-Manganese dioxide / organic electrolyte

Shelf Life *

10 years

UL Recognition

MH 28845

Nominal Voltage [V]

3

Typical Capacity C [mAh]

137 (Load 15000 Ω at 20° C down to 2.0 V)

Permissible Temperature Range

min: max:

Storage

-55° C 60° C

Discharge

-30° C 60° C

Weight, approx. [g]

1.88

Volume [ccm]

0.60

Dimensions [mm]

min: max:

A	15.70	16.00
B	2.90	3.20
E	13.00	
C	0.20	

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage[V]	2.0
Continuous	15000 Ω	Time [h]	710
24h/d, 7d/w		Capacity [mAh]	137

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries

* In consideration of typical loss of capacity at storage and application.