


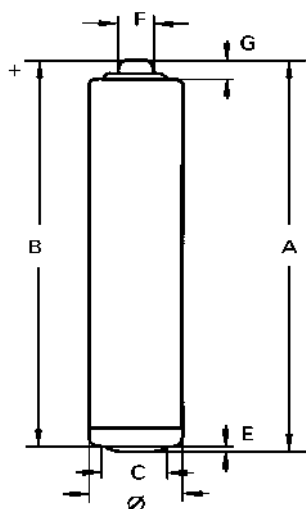

Type Designation	4906
Designation IEC	LR6
System	Zn-MnO ₂ (Alkaline)
Shelf Life (Coding)*	10 years
Nominal Voltage [V]	1.5
Typical Capacity C [mAh]	2970 (discharge with high-resistance)
Permissible Temperature Range	- 10 °C ... 50 °C
Weight, approx. [g]	23,8
Volume [ccm]	7.5
Dimensions [mm]	min: max:

Ø	13.7	14.5
A	-	50.5
B	49.5	-
C	7.0	-
E	-	0.5
F	-	5.5
G	1.0	-


Typical Capacities (at 20°C):

Discharge Type	Load	End Voltage[V]	0.8
1H/D,7D/W	3,9 Ω	Time [h]	8,4
Motor / toy		Capacity [Ah]	2,47
		Energy [Wh]	2,86
Discharge Type	Load	End Voltage[V]	0.9
1H/D,7D/W	250 mA	Time [h]	9,1
Toy, non motorized		Capacity [Ah]	2,32
		Energy [Wh]	2,81
Discharge Type	Load	End Voltage[V]	0.9
4M/H, 8H/D, 7D/W	3,9 Ω	Time [min]	474
Portable Lighting		Capacity [Ah]	2,46
		Energy [Wh]	2,96

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries

* In consideration of typical loss of capacity at storage and application.

VARTA Consumer Batteries GmbH & Co. KGaA
Alfred-Krupp-Str. 9, 73479 Ellwangen/Germany

Subject to change without prior notice
Page 1 / 1 Date of issue: 2021-08-04