


LogiLink_®

Universal Notebook Power Supply, 90W

Art. No.: PA0215

Ideal as a replacement or secondary power adapter for various notebooks at home and at the office.

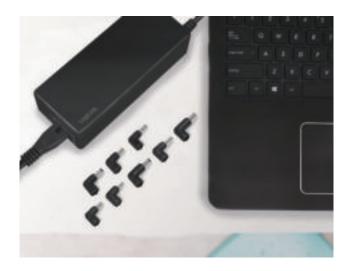

Versatile Power Supply

Provides 9 different tips for charging most notebooks in the market.





6.5 x 4.5mm



6.3 x 3mm 5.5 x 2.5mm







5.5 x 2.5mm 5 x 3mm 5.5 x 2.1mm 6 x 4.5mm 7.9



Multiple Protection

Supports overcurrent, overvoltage, overheating and short circuit protection.








*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.



LogiLink_®

Universal Notebook Power Supply, 90W

Art. No.: PA0215

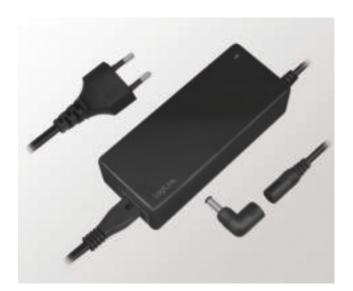

Automatic Output Detection

Automatic output detection for different notebooks.



Specification:


Input	100-240V AC 50/60Hz 1.5A
Output	15V 4.9A / 16V 4.9A / 18.5V 4.9A / 19V 4.7A / 19.5V 4.6A / 20V 4.5A (Max. total output: 90W)
Protections	Overcurrent, overvoltage, overheating and short circuit
Operating Temperature	0~40°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	25% ~ 90% (non-condensing)
Storage Humidity	10%~90% (non-condensing)
Efficiency	Level V
Dimension	137 x 71 x 35mm (not including cable)
Weight	285g











LogiLink_®

Universal Notebook Power Supply, 90W

Art. No.: PA0215

Tips Compatibility Table:

M1	6.3 x 3mm	Toshiba, NEC / 15V
M2	5.5 x 2.5mm	IBM, Lenovo / 16V
M3	6.5 x 4.5mm	Sony, Fujitsu / 16V
M4	4.8 x 1.7mm	HP / 18.5V
M5	5.5 x 2.5mm	HP, Toshiba, Acer, Sony, NEC, Lteon, Asus, Dell, IBM, Gateway / 19V
M6	5 x 3mm	Samaung / 19V
M7	5.5 x 2.1mm	Acer, NEC, Liten / 19V
M8	6 x 4.5mm	Sony / 19.5V
M9	7.9 x 5.5mm	Lenovo / 20V















Package Contents:

- » 1 x Universal Power Adapter
- » 9 x Changeable Tips
- » 1 x AC Power Cord
- » 1 x User Manual

Package Information:

» Packing Dimension: 176 x 127.5 x 55mm

» Packing Weight: 0.45kg

» Carton Dimension: 585 x 390 x 145mm

» Carton Q'ty: 20pcs» Carton Weight: 9.7kg





